



VENEERSTONE™

PRODUCT PROFILE:
THIN BRICK COLLECTIONS


THIN BRICK COLLECTIONS

PROFILE INFORMATION & COLOR OPTIONS

Create stunning exteriors or interiors with our thin brick lines featuring the Antique, Modular and King profiles. Available in a variety of sizes, styles and colors these thin brick options will add character and appeal to any project.

ANTIQUE COLOR OPTIONS

Old World feel with rustic charm and a more organic feel from the texture & irregular edges.

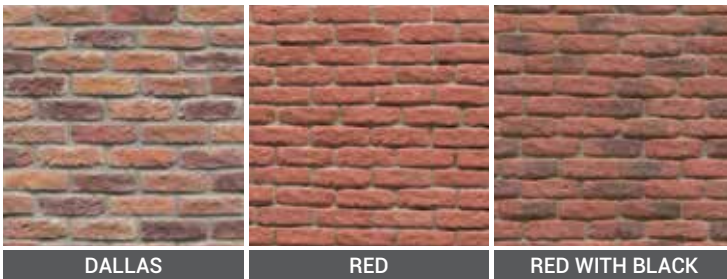

FLATS: SIZE WILL VARY BY UNIT

LENGTH: 7" | HEIGHT: 2" | WEIGHT: 7 LBS. | THICKNESS: .75"

Coverage & packaging based on 1/2" mortar joints. Flats packaged in **20 sq. ft.** handy box based on 1/2" mortar joints.


CORNERS: SIZE WILL VARY BY UNIT

HEIGHTS: 2" | SHORT RETURN: 3" | LONG RETURN: 6.5" | THICKNESS: .75"

Corners packaged in **15 lin. ft.** handy box based on 1/2" mortar joints. 41/2 lbs. per sq. ft.

MODULAR COLOR OPTIONS

Irregular "wire-cut" look with balanced texture. Its deep, rich colors give warmth to any project.

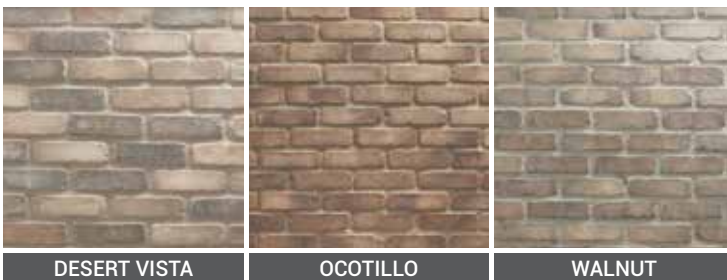

FLATS: SIZE WILL VARY BY UNIT

LENGTH: 7.38" | HEIGHT: 2.25" | WEIGHT: 7 LBS. | THICKNESS: .5"

Coverage & packaging based on 1/2" mortar joints. Flats packaged in **20 sq. ft.** handy box based on 1/2" mortar joints.

CORNERS: SIZE WILL VARY BY UNIT


HEIGHTS: 2.25" | SHORT RETURN: 2.75" | LONG RETURN: 7.63"

THICKNESS: .5"

Corners packaged in **15 lin. ft.** handy box based on 1/2" mortar joints. 41/2 lbs. per sq. ft.

KING COLOR OPTIONS

Modern, sleek look and feel with consistent, clean, crisp lines.

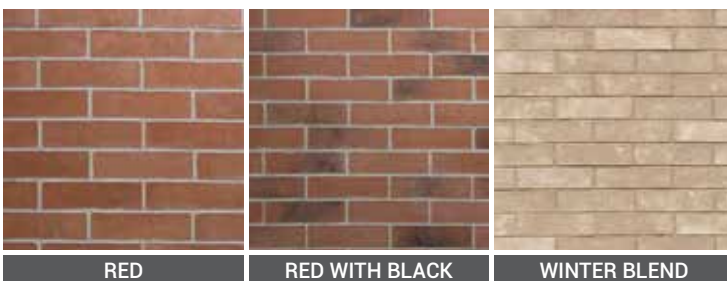

FLATS: SIZE WILL VARY BY UNIT

LENGTH: 9.5" | HEIGHT: 2.5" | WEIGHT: 7 LBS. | THICKNESS: .75"

Coverage & packaging based on 1/2" mortar joints. Flats packaged in **15 sq. ft.** handy box based on 1/2" mortar joints.

CORNERS: SIZE WILL VARY BY UNIT

HEIGHTS: 2.5" | SHORT RETURN: 2" | LONG RETURN: 7" THICKNESS: .75"

Corners packaged in **10 lin. ft.** handy box based on 1/2" mortar joints. 41/2 lbs. per sq. ft.

TECH DATA

- Compressive Strength (at 28 days) Meets or exceeds ASTM standard 1800 PSI — typical result 5,500 PSI avg. min.
- Water Absorption (at 28 days) Does not exceed 15.2%
- Fireproof? Yes: Will not contribute to smoke or flame development
- Colorfastness: Existing applications show no undesirable change in coloring after years of weathering

Actual product color may vary. We recommend reviewing product samples before making final color selections. All Veneerstone products are NCMA certified and comply with ASTM C1670/C1780. Visit venerstone.biz for installation guidelines and more information. *Some colors are considered premium based on availability and cost increases of manufacturing materials.

VENEERSTONE™

VENEERSTONE.BIZ | 800.781.0277 | LEEBP.COM



MADE IN THE USA



LEE | **BUILDING PRODUCTS®**

©2023 VENEERSTONE BY LEE BUILDING PRODUCTS. ALL RIGHTS RESERVED.