

Thank you for choosing Rosetta hardscape products. The following are some helpful tips to make your first installation go smoothly. For more in-depth technical information, see our Rosetta Technical Guide (available at discoverrosetta.com) or contact Bob Conklin with Rosetta Technical Support at (877) 777-6558 ext 3081.

Your safety is important to us. Please follow OSHA guidelines, and utilize safety-toe boots, hardhats, gloves and eye, ear & respiratory protection whenever appropriate.

PATTERNS

- Follow our simple layout patterns to create patios and walkways.

BLEND MULTIPLE PALLETS

- In order to achieve the best possible color blend, utilize material from multiple pallets simultaneously (when applicable).

BORDERS

- A cut-off saw can be used to create straight or curved borders. (use proper safety equipment)

LOAD LIMITS

- Unlike a typical paver installation, do not run a plate compactor across the surface of Dimensional Flagstone. Excessive force can crack the flagstone surface. Dimensional Flagstone is not suitable for vehicular traffic.

**Do not use de-icing salts on Dimensional Flagstone pavers. Use of de-icing salts can damage the paver surface and will void the product warranty.*

REQUIRED TOOLS

- PLATE COMPACTOR
- SHOVEL
- RAKE
- LEVEL
- LOW-PROFILE PAVER RESTRAINT


OPTIONAL TOOLS:

- CUT-OFF SAW
- DEAD BLOW HAMMER
- SCREED RAILS & SCREED BOARD


DIMENSIONAL FLAGSTONE

QUICK INSTALL TIPS

TYPICAL CROSS-SECTION

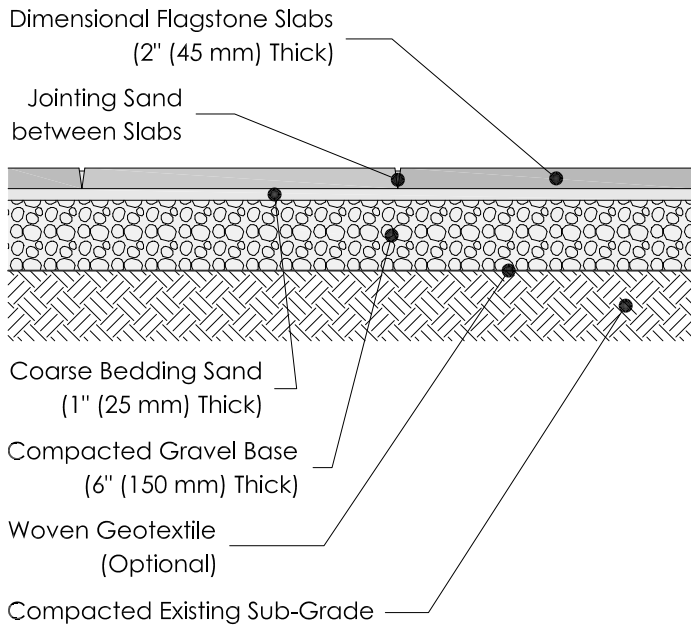

PATIO LAYOUT

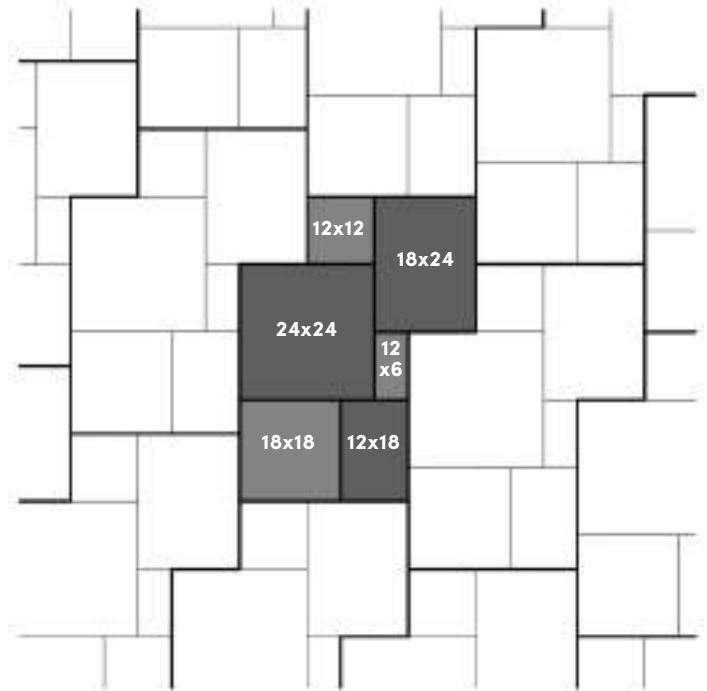

WALKWAY LAYOUT

